


1000 Base-T Single port LAN Transformer Module MODEL NO:GT1802D



Feature:

Designed to meet IEEE802.3ab requirement

Wave solder conditions: Maximum temperature is $260^{\circ}\text{C} \pm 5^{\circ}\text{C}$
time is 5~6sec(refer to SONY ss-00254-4 standard)

Primary inductance(L_p):350uH Min. 100KHz, 100mV, 8mAdc

Operate Temperature: 0 to $+70^{\circ}\text{C}$

Storage Temperature range: -25°C to $+125^{\circ}\text{C}$




HI-POT:1500Vrms 1mA

Electrical Specifications at 25°C — Operating Temprange: 0°C To $+70^{\circ}\text{C}$

Part Number	Transformer Turns ratio ($\pm 5\%$) Receive Transmit	Insertion Loss (dB TYP) 1-100MHz	Crosstalk (dB TYP) 30 /60/100(MHz)	Return loss (dB TYP) 30/40/50//60~80/100(MHz)	CMRR (dB TYP) 1-100/(MHz)
GT1802D	1CT:1CT	-1.0	-40 -35 -30	-18/ -14.4/ -13.1/ -12/-10	-30

Dimension: mm

Schematics:

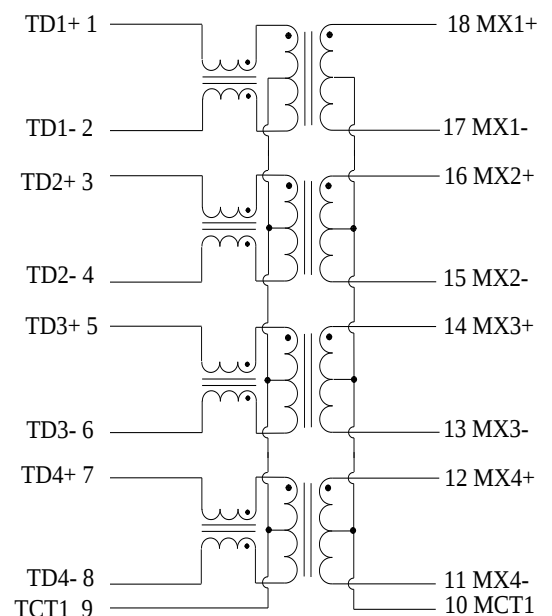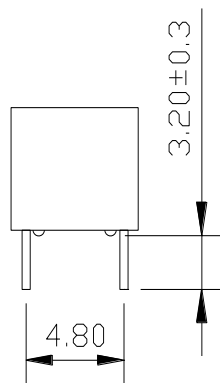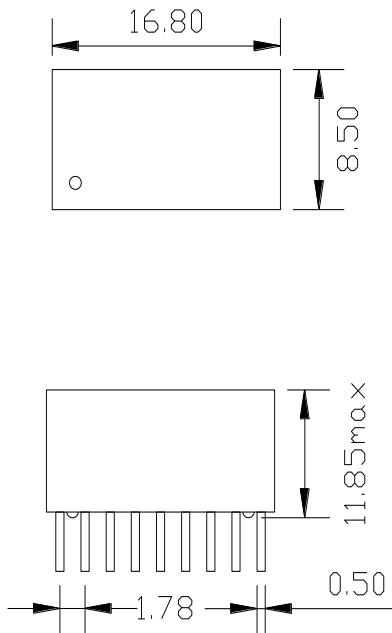

Data sheet subject to change without notice

Unless otherwise specified, all tolerance are $\pm 0.25\text{mm}$

TE-JIN TECHNOLOGY CO.,LTD

TEL:86-769-81802907

FAX:86-769-81803750

E-mail:gc@tejinww.com

ADD: B1-2F,TangHong Industrial Zone ,Shi Jie Town, Dong Guan City, Guang Dong Province,China