


1000 Base-T Dual port LAN Transformer Module MODEL NO:GT3603D




Feature:

Designed to meet IEEE802.3ab requirement
Wave solder conditions: Maximum temperature is $260^{\circ}\text{C} \pm 5^{\circ}\text{C}$
time is 5~6sec(refer to SONY ss-00254-4 standard)
Primary inductance(Lp): 350uH Min. 100KHz, 100mV, 8mAdc
Operate Temperature: 0 to $+70^{\circ}\text{C}$
Storage Temperature range: -25°C to $+125^{\circ}\text{C}$
HI-POT:1500Vrms 1mA


Electrical Specifications at 25°C — Operating Temprange: 0°C To $+70^{\circ}\text{C}$

Part Number	Transformer Turns ratio ($\pm 5\%$) Receive Transmit	Insertion Loss (dB TYP) 1-100MHz	Crosstalk (dB TYP) 0.5~40 /60/80/100(MHz)	Return loss (dB TYP) 0.5-40/60/80/100(MHz)	CMRR (dB TYP) 0.1~100(MHz)
GT3603D	1CT:1CT	-1.1	-35 -31 -29 -27	-18/ -14.4/ -12/ -10	-30

Dimension: mm

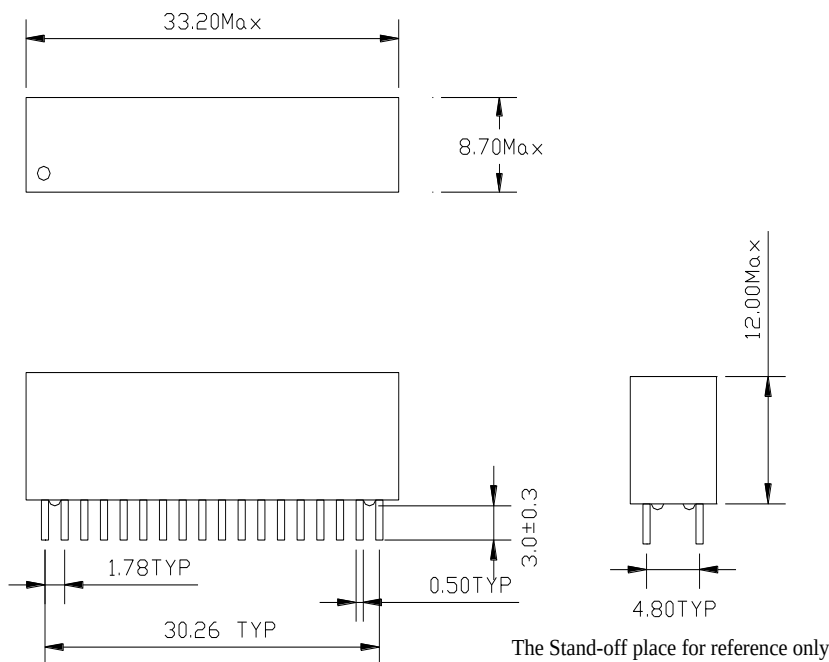

Schematics:

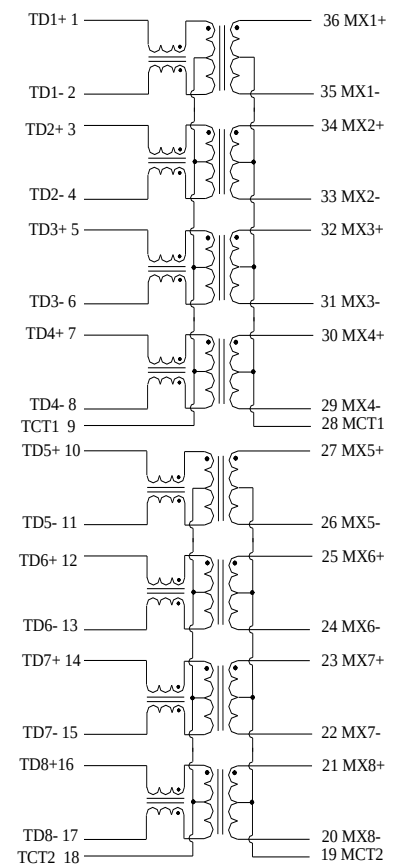

Data sheet subject to change without notice

Unless otherwise specified, all tolerance are $\pm 0.25\text{mm}$

TE-JIN TECHNOLOGY CO.,LTD

TEL:86-769-81802907

FAX:86-769-81803750

E-mail:gc@tejinww.com

ADD: B1-2F,TangHong Industrial Zone ,Shi Jie Town, Dong Guan City, Guang Dong Province,China